

Side Access Carbon

Part of a Total Systems Approach to Improved Indoor Air Quality (IAQ)

The Carbon Concept

The Side Access Carbon filter housing is designed for use with air handling units or other side access equipment. It offers the convenience of servicing the filter from outside the air duct and is especially suited for installations involving limited headroom.

The Side Access Carbon housing is a gas phase filtration system. It removes gaseous contaminants (note: gaseous contaminants are not captured by particulate filters) from the airstream through adsorption, and in some cases, chemical neutralization. During the adsorption process, gaseous molecules are physically attracted to the surface of the adsorbent medium where they are captured and retained.

High Quality Media for Maximum Adsorption

The Side Access Carbon housing is available with a high quality activated charcoal (coconut shell based carbon), which is effective on a large range of common gaseous contaminants. The carbon conforms to a 4 x 8 mesh and has a minimum activity of 60% on carbon tetrachloride.

Since activated charcoal is not recommended on all gases, AAF International also offers alternative media such as activated alumina impregnated with Potassium Permanganate. The impregnant neutralizes the contaminant after it has been adsorbed. Such speciality media are effective on Formaldehyde, SO₂ and H₂S.

Trays are Easy to Use and Reuse

Each Side Access Carbon tray is furnished with 45 pounds of activated charcoal per 1,000 CFM of rated capacity. The retention time of the gas stream at the rated flow of 500 FPM is 0.09 seconds. Retention time can be increased by installing multiple housings in series or in parallel, or reducing the flow rate. The trays have a removable end cap which allows them to be refilled with fresh adsorbent on site. If desired, the emptied trays can be returned for refill.



Side Access Carbon, side view, showing "V" bank trays.



Prefilters Protect Adsorption Media


Prefilters are recommended to protect the adsorbent media. AAF recommends using 30% average efficiency rated filters (per ASHRAE 52.1-1992) ahead of the adsorber filters.

When an impregnated speciality media is used, after-filters should be installed (see AAF's Side Access Flatbank and Side Access Vee-Bank housing). The after-filter will capture any dusting that may result from chemical reactions between the contaminant and the impregnant. The housing can also be installed in a reverse flow direction with the prefilter on the downstream side.

Side Access Filter Housing for IAQ Applications

The Side Access housing was specifically designed to meet IAQ air cleaning requirements when used with AAF high-efficiency prefilters treated with antimicrobial.

The Side Access housing is ideal for removing the gaseous contaminants, including VOCs (Volatile Organic Compounds), that cause allergic reactions, discomfort, and health risks. Buildings with a cleaner air supply have reduced maintenance costs and healthier, more productive employees and tenants.

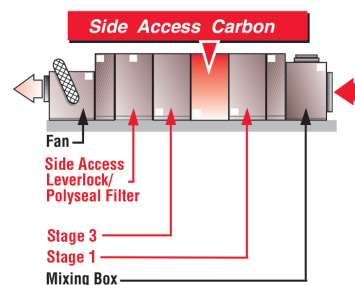

Use the Side Access Carbon in combination with other AAF International IAQ-engineered filter products to enhance your system performance.

Contact Us Today!

1.800.477.1214

redfiltration@aafintl.com

Trust the Power of RED



BETTER AIR IS OUR BUSINESS®



RED Filtration™

Reliable Efficient Durable™

Side Access Carbon

Housing Features

Rugged Construction

The Side Access Carbon housing is manufactured with exceptional structural strength. It utilizes 1-5/16" wide flanges, welded construction, and vertical supports and angle braces. The Carbon housing is designed to operate at up to 6" WG negative or positive pressure.

Access Doors

Access doors are hinged and have over-center draw type plated latches. The doors seal against the housing using closed cell neoprene gasket. The standard housing is furnished with two doors.

Sizes

The Side Access Carbon housing is offered in various sizes spanning heights from nominal 1' through 8', and widths from nominal 1' through 12'. Capacities range from 1,000 CFM to 48,000 CFM at 500 FPM.

Larger sizes are available. The Side Access Carbon housing is designed to expand using standard sizes as building blocks. For example, a nominal 16' wide unit can be built using two 8' wide modules or an 8' high unit using two 4' modules. Modules are factory pre-engineered for field installation.

Housing Depths

The standard housing is 36" deep, which includes a 2" or 4" prefilter track.

2" or 4" Prefilter

Available with a 2" or 4" prefilter track to accommodate standard 2" or 4" prefilters. The prefilters slide on raised rounded ribs for easy installation and removal.

Steel Skin Insulation

All Side Access Carbon housings can be furnished with optional 2" fiberglass insulation. Enclosed in a double metal skin, the insulation is external to the airstream. This optional insulation covers both doors, and top and bottom pans.

Carbon Trays

The adsorber trays are nominal 24" x 24" x 1" trays filled with virgin coconut shell carbon or SAAF Oxidant media.

Standard

- Two depths (36" & 38")
- 60% activity 4 x 8 mesh coconut shell based activated carbon charcoal
- Refillable enamel coated steel trays
- Structurally rated up to 6" positive pressure
- 16-gauge galvanized steel
- Welded construction
- 1-5/16" turned out flanges
- Integral prefilters, 2" or 4"
- Internal bracing
- Factory assembled

Options


- Double skin insulation
- AHU mating flanges
- Weatherproof construction
- High pressure construction
- Installed pressure gauges
- Static pressure taps
- Speciality media

Capacities (CFM) and Dimensions

| Height ↓ | Designation | Width → | | | | | |
|----------|-------------|---------|---------|---------|---------|----------|----------|
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| | Housing | 26-7/8" | 49-1/2" | 72-7/8" | 96-1/4" | 119-7/8" | 143-1/4" |
| 1 | 26-7/8" | 2,000 | 4,000 | 6,000 | 8,000 | 10,000 | 12,000 |
| 2 | 51" | 4,000 | 8,000 | 12,000 | 16,000 | 20,000 | 24,000 |
| 3 | 75-1/8" | 6,000 | 12,000 | 18,000 | 24,000 | 30,000 | 36,000 |
| 4 | 99-1/4" | 8,000 | 16,000 | 24,000 | 32,000 | 40,000 | 48,000 |

Note: Capacities are based on an airflow velocity of 500 FPM. Half size filter housings are available.

| Prefilter Depth | Housing Depth |
|-----------------|---------------|
| 2" | 36" |
| 4" | 36" |

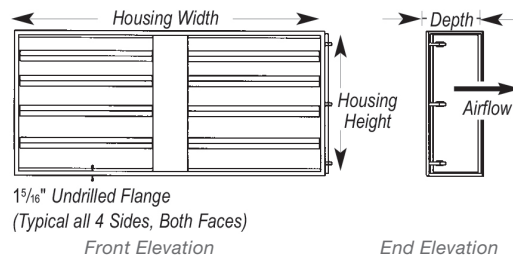

Operating pressure drop at 500 FPM is 0.35" WG

The information in this document is the property of AAF® International and may not be copied or distributed to any third party, or used for any purpose other than that for which it is supplied, without the express written consent of AAFCI.

While the information herein is provided in good faith based on information available when the document was created, it should not be relied upon as being complete or accurate, and the products advertised within this document, and their components and accessories, are subject to change without notice. AAFCI provides this information on an AS IS basis and makes no warranties, expressed or implied, or representations regarding same. This document does not establish, and should not be taken as establishing, any contractual or other commitment binding upon AAFCI or any of its subsidiaries or associated companies.