


PrecisionCell® HT

(High Temperature)

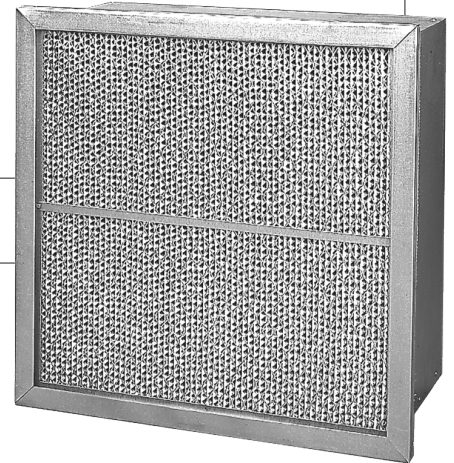

RIGID FILTERS

Product Overview

- Continuous duty up to 900°F (482°C)
- Aluminized steel construction
- Faceguards and grid straps
- MERV 14, MERV 13, and MERV 11

Specifications

Frame	24-gauge aluminized steel
Media	Dual layer microfine fiberglass
Separators	Hemmed-edge corrugated aluminum
Header Frame	3/16" wide aluminized steel
Faceguards	Aluminized steel expanded
Cross Bracing	1/2" "T" strap downstream and horizontal strap upstream

Product Information

Efficiency	Operating Limit °F	Nominal Size (inches) (H x W x D)	500 FPM Rating		Area (sq. ft.)	Weight Each (lbs.)
			CFM	PD		
MERV 11	750	24 x 24 x 12	2000	0.45	140	26
		24 x 12 x 12	1000		0.50	21
	900	24 x 24 x 12	2000	0.50	175	28
		24 x 24 x 12	1000		0.60	22
MERV 13	750	24 x 24 x 12	2000	0.55	140	26
		24 x 24 x 12	1000		0.70	21
	900	24 x 24 x 12	2000	.60	175	28
		24 x 12 x 12	1000		90	22
MERV 14	750	24 x 24 x 12	2000	.65	140	26
		24 x 12 x 12	1000		69	21
	900	24 x 24 x 12	2000	.70	175	28
		24 x 12 x 12	1000		90	22

All performance data based on ASHRAE Standard 52.2. Performance tolerance conforms to Section 6.4 of ANSI/AHRI Standard 850-2013.

Underwriters Laboratories Classification – PrecisionCell filters are UL Classified. Testing was performed according to UL Standard 900.

PrecisionCell® is a registered trademark of Flanders Corporation in the U.S.

